



### Experience the most versatile and easy to manage switches in the market

As a leading provider of network equipment for SMBs, NETGEAR® understands the importance of reliable and high performance networks. With the growth of virtualization, cloud-based services and applications like VoIP, video streaming and IP surveillance, SMB networks need to extend beyond simple reliability to simpler management and remote monitoring to ensure your network is "always up".

NETGEAR also understands that small business owners shouldn't have to

understand networking and IT; they need a network that's easy-to-setup and is reliable, so they can focus on their business, not their network. To that end, NETGEAR is introducing our most versatile and easyto-manage switches ever, NETGEAR Smart switches with optional remote/cloud management.

The Smart Gigabit Ethernet Switches with optional remote/cloud management are the first switches from NETGEAR with anywhere configuration and management. Using either the NETGEAR Insight app on your mobile device or tablet, or the Insight Cloud Portal from your PC, Mac, or tablet, you can quickly discover, setup, monitor and manage your Smart Switches from anywhere in the world! With their remote cloud manageability, sleek design silent or whisper-quiet operation, they are the most versatile switches in the market for any environment.

Whether at home, out of the office or on a business trip, you can still manage and monitor your network as if you were right there.

### More innovative features for the most versatile and easy-to-manage switches in the market

#### Your network. Anytime. Anywhere.

The NETGEAR Smart switches with optional remote/cloud management fundamentally change the way you think of networks and IT. Using the NETGEAR Insight app with Smart switches with optional remote/cloud management and Wireless Access Points provides:

• Instant in-app discovery & set-up

- Local or remote configuration and monitoring from your mobile device, PC, Mac or tablet
- Centralized network configuration polices with auto-join and configure (zero-touch provisioning)
- Multi-site/remote network management and monitoring with single pane-of-glass view
- Multi-switch/multi-port concurrent configuration using the Port Config Wizard

#### Remote monitoring and management from the palm of your hand!

With the NETGEAR Insight app, you can setup, manage, and monitor your networks from anywhere, anytime, from the palm of your hand on your phone or tablet! Or, for a larger screen experience, you can use the Insight Cloud Portal from your PC, Mac, or tablet web browser.



## Network-centric configuration and management

NETGEAR Smart switches with optional remote/cloud management and Wireless Access Points using the NETGEAR Insight app allow for cross-device automated configuration of VLANs, QoS, ACLs, and LAGs. Auto-join and configure (zerotouch privisioning) allows for additional devices added seamlessly.

### Fully-integrated cloud-manageable devices

NETGEAR Smart switches with optional remote/cloud management are fully-integrated, cloud-manageable, plug-and-play devices. Just connect to your network and without any setup, they're passing traffic. For configuration setup, management, and monitoring, you can use the Insight mobile app on your mobile device or the Insight Cloud Portal from your PC, Mac, or tablet web browser. No additional cloud controller, appliance, network manager, or onpremise cloud server necessary.

## Clean, sleek silent (or whisper-quiet) designs

Select Smart switches with optional remote/cloud management have a modern, clean design, with simple power and cloud connection LEDs on the front. On the back (port side), there are also ata-glance cloud, power, fan, and PoE max¹ LEDs for quick status monitoring, and onport LEDs for link/activity and PoE power¹ allow for port-specific connectivity monitoring. GC110, GC110P, and GC510P models are all fanless and silent, while GC510PP has a whisper-quiet fan.

## Great choice of non-PoE, PoE and PoE+ options

All models have 8 copper Gigabit Ethernet ports and two 1G SFP fiber ports for uplinks. On PoE/PoE+ models, all 8 gigabit copper ports support PoE or PoE+, with varying PoE power budgets to suit every need.

### Build a future-proof network with NETGEAR Smart switches

- Extensive L2+/L3 Lite switching features including static routing
- Comprehensive IPv6 management, QoS and ACL support, ensuring investment protection and a smooth migration to IPv6-based networking
- Advanced QoS with IPv4/IPv6 ingress traffic filtering (ACLs) and prioritization (QoS)
- Dynamic VLAN assignment for easy user authentication and location independent access to network
- Up to 195W PoE power, with the flexibility to add power-hungry devices such as 11ac Wireless APs, VoIP voice and video phones, security/surveillance cameras including PTZ, and other IoT devices
- Advanced per-port PoE controls (set specific power budget per port in addition to automatic class-defined) and PoE scheduling on PoE models

#### **NETGEAR** quality and reliability

- Industry-leading 5-year Limited Hardware Warranty\*
- Minimal down-time with Next-Business-Day Replacement Warranty
- Get deployment assistance with 90-days
   Free Advanced Technical Support\*\*









#### Hardware at a Glance

	FRONT		REAR						
Model Name	Form-Factor	LEDs (System)	100M/1G Copper (RJ-45) Ports	1G SFP Fiber Ports	PoE/PoE+ Ports (Budget)	LEDs (Per Port)	Power Supply	Fans	
GC110	Desktop, Wall mount	Cloud, Power	8	2 (dedicated)	N/A	Speed/Link/ Activity	External adapter	Fanless	
GC110P	Desktop, Wall mount	Cloud, Power, PoE Max	8	2 (dedicated)	8 PoE (62W)	Speed/Link/ Activity, PoE	External adapter	Fanless	
GC510P	Desktop, Wall mount, Rackmount (kit)	Cloud, Power, PoE Max	8	2 (dedicated)	8 PoE+ (134W)	Speed/Link/ Activity, PoE	1 internal PSU, fixed	Fanless	
GC510PP	Desktop, Wall mount, Rackmount (kit)	Cloud, Power, PoE Max, Fan	8	2 (dedicated)	8 PoE+ (195W)	Speed/Link/ Activity, PoE	1 internal PSU, fixed	1 internal fan, fixed	



GC110: 8-Port Gigabit Ethernet Smart Switch with 2 SFP Fiber Ports

- 8 x 1000BASE-T Copper ports supporting 1G/100M speeds
- 2 x 1000BASE-X Dedicated SFP Fiber ports
- Fanless (0dB)



GC110P: 8-Port Gigabit Ethernet PoE Smart Switch with 2 SFP Fiber Ports

- 8 x 1000BASE-T Copper PoE ports supporting 1G/100M speeds
- 2 x 1000BASE-X Dedicated SFP Fiber ports
- 62W PoE budget (fanless, 0dB)



GC510P: 8-Port Gigabit Ethernet PoE+ Smart Switch with 2 SFP Fiber Ports

- 8 x 1000BASE-T Copper PoE+ ports supporting 1G/100M speeds
- 2 x 1000BASE-X Dedicated SFP Fiber ports
- 134W PoE budget (fanless, 0dB)



GC510PP: 8-Port Gigabit Ethernet PoE+ High-Power Smart Switch with 2 SFP Fiber Ports

- 8 x 1000BASE-T Copper PoE+ ports supporting 1G/100M speeds
- 2 x 1000BASE-X Dedicated SFP Fiber ports
- 195W PoE budget (max 28dB @ 25°C / 77°F ambient)



#### Software at a Glance

MANAGEM		LAYER 2+ / LAYER 3 LITE FEATURES							
Device Management	Network-wide Management	IPv4/IPv6 ACL and QoS	IPv4/IPv6 Multicast Filtering	VLANs	Auto-VoIP, Auto-Video	Convergence	Link Aggregation/ Port Trunking	Jumbo Frame Support	IPv4 & IPv6 Static Routing
Local web browser- based management GUI Optional NETGEAR Insight mobile app or Insight Cloud Portal for local/remote/anywhere management from your mobile device, PC, Mac, or tablet IPv4 & IPv6 management	Centralized network configuration (policies) Auto-join & configure (zero-touch provisioning) Multi-site, multi-network single pane-of-glass view Multi-switch/ multi-port concurrent configuration	L2, L3, L4 Ingress	IGMP and MLD Snooping	Static, Dynamic, Voice, Video, MAC, Protocol- based, and Private	Yes	LLDP-MED, RADIUS, 802.1X	LACP and Manual Static LAGs (up to 5 LAGs with max 8 members)	Yes (up to 9,216 packet size)	Yes

#### Performance at a Glance

Model Name	CPU & Memory	Fabric (Full- duplex)	Latency (64-byte Packet)	Packet Buffer	Packet Forwarding Rate (64-byte)	ACLs	MAC Address Table ARP/NDP Table VLANs	Static Routes (IPv4 & IPv6)	Priority Qeues	Mul- ticast IGMP Groups
GC110 GC110P GC510P GC510PP	400 MHz Cortex- A9 Single Core, 256MB RAM 8MB SPI + 256 NAND FLASH	20Gbps line-rate	1G Copper: 3.000 μs 1G SFP: 2.000 μs	1.5 MB	14.9 Mfps	100 (shared)	16K MAC (dynamic) 384 ARP/128 NDP 256 VLANs	IPv4: 32 IPv6: 31	8 (WRR)	512



#### Features and Benefits

• Port-based egress rate limiting

Hardware Features	
Fully-integrated Cloud-manageable Devices	Require no additional hardware (cloud keys, network portals, local servers, VPN or proxy appliances etc) to directly connect to the cloud and allow remote management. No additional hardware, no software or server to setup; nothing. Just connect and go.
1000BASE-T Copper Ethernet PoE (GC110P)/ PoE+ (GC510P/GC510PP) connections	Support high-density VoIP, Surveillance and Wi-Fi AP deployments, scalable for future growth. Never face the risk of running out of PoE ports or PoE power budget.
1000BASE-X SFP ports	Two dedicated Gigabit SFP ports Dedicated SFP ports provide fiber uplinks without sacrificing any downlink copper Gigabit Ethernet port, and across long distances. Support for Fiber and Copper modules.
Front Cloud & Power LEDs	Quickly confirm switch has power and is connected to the cloud/internet.
Silent or Low (GC510PP) Acoustics	Fanless design (all except GC510PP) allows for silent operation; temperature- and load-based fan-speed control (GC510PP) provides whisper-quiet operation; great for deployment in noise-sensitive environments.
Energy Efficient Ethernet (IEEE 802.3az)	Maximum power reduction for ongoing operation cost savings.
Desktop, Wall mount, or Rackmount (GC510P, GC510PP)	Flexible deployment on desktop, wall or other location using 75mm VESA-compliant mounts, or rackmount using the included rackmount kit (GC510P, GC510PP only).
Kensington Lock Slot	Prevent theft, removal, or tampering when used for desktop deployment.
Software Features	
Remote setup, management, and monitoring anywhere, anytime, from your mobile device, PC, Mac, or tablet	Locally or remotely setup, configure, manage, monitor or even trouble- shoot your network from anywhere, anytime. Check network status, view dashboards for network health and activity, power cycle PoE ports, etc, and update firmware remotely. No need to be on-site, open up ports to your network, or VPN into it.
Auto-join and Configure (Zero-Touch Provisioning)	Additional Insight Managed devices added to the network automatically inherit settings and configuration.
Multi-site, Multi-network Single Pane-of-Glass View	View and configure multiple networks across multiple sites, all from one single app; NETGEAR Insight.
Comprehensive IPv6 Support for Management, ACLs and QoS	Build current network with future in mind. Ensure investment protection and a smooth migration to an IPv6-based network without switch replacement.
IPv4 & IPv6 Static Routing	A simple way to provide segmentation of the network with internal routing through the switch - reserving the router for external traffic routing only, making the entire network more efficient.
Robust security features:  • 802.1x authentication (EAP)  • Port-based security by locked MAC  • ACL filtering to permit or deny traffic based on MAC and IP addresses	Build a secured, converged network with all types of traffic by preventing external attacks and blocking malware while allowing secure access for authorized users.
Comprehensive QoS features:  • Port-based or VLAN 802.1p-based prioritization  • Layer 3-based (DSCP) prioritization	Advanced controls for optimized network performance and better deliver of mission-critical traffic such as voice and video.



Software Features (continued)	
Auto-VoIP, Auto-Voice VLAN, and Auto-Video VLAN	Automatic Voice over IP prioritization (Auto-VoIP) simplifies most complex multi-vendor IP telephone deployments either based on protocols (SIP, H.323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address, providing the best class of service to VoIP streams (both data and signaling) over other ordinary traffic by classifying traffic, and enabling correct egress queue configuration. Similarly, Auto-Video VLAN enables IGMP snooping to minimize broadcast streams.
IGMP Snooping and MLD Snooping	Facilitate fast receiver joins and leaves for multicast streams. Save cost and improve network efficiency by ensuring multicast traffic only reaches designated receivers without the need of an extra multicast router.
Protected Ports	Ensure no exchange of unicast, broadcast, or multicast traffic between the protected ports on the switch, thereby improving the security of your converged network. This allows your sensitive phone phone conversations to stay private and your surveillance video clips can be forwarded to their designated storage device without leakage or alteration.
DHCP Snooping	Ensure IP address allocation integrity by only allowing DHCP messages from trusted DHCP servers and dropping malformed DHCP messages with a port or MAC address mismatch.
Dynamic VLAN Assignment (RADIUS)	IP phones and PCs can authenticate on the same port but under different VLAN assignment policies. Users are free to move around and enjoy the same level of network access regardless of their physical location on the network.
Private VLAN	Private VLANs help reduce broadcast with added security.
Port Trunking/Link Aggregation (LACP)	Build up bigger bandwidth to support aggregated uplink/downlink traffic or to provide redundant link(s). Aggregate up to 8 ports for 8Gbps connections.
Loop Prevention and Auto-DoS Prevention	Detect and prevent (auto port shutdown) accidental network loops and protect against DoS attacks.
PoE Timer and Scheduling (except GC110)	Allows IT administrators to increase network security, better utilize network resources and conserve energy by scheduling or remotely controlling on/ off of PoE ports.
Port Mirroring and Cable Test	Many-to-one port mirroring for better and quicker network diagnostics and troubleshooting. Cable test easily identifies bad Ethernet cables.
Firmware Updates from Cloud	Direct cloud-to-device firmware updates, initiated and/or scheduled using the Insight app, all from the palm of your hand, anytime, anywhere!
Multiple Language Local GUI	Product documentation and local-only web user interfaces are translated, giving you the ability to select your preferred language <sup>2</sup> .

<sup>&</sup>lt;sup>2</sup> English, German, and Japanese are the current supported languages in the local-only web GUI. The Insight mobile app and Insight Cloud Portal support local languages per the device used (phone or computer browser).



### Why Smart switches with optional remote/cloud management?

NETGEAR is revolutionizing unified, centralized network management with it's new line of Smart switches with optional remote/cloud management and Wireless Access Points, all managed from the palm of your hand, anytime, anywhere, on your phone or tablet using the NETGEAR Insight mobile app. Or, for a larger screen experience, from your PC, Mac, or tablet web browser using the Insight Cloud Portal.


- Ideal for SMBs, offices, retail stores, education, healthcare, owner-operated businesses, etc.
- IT expert or no networking experience at all: Smart switches with optional remote/cloud management let you focus on your business, not maintaining your network.
- Know immediately if and when your network is not running perfectly; not after you've already lost business or suffered significant down-time.
- Advanced L2+/L3 Lite network features such as IPv4/IPv6 management, VLANs, DiffServ QoS, LACP Link Aggregation,
   Spanning Tree, Static Routing, advanced per-port PoE controls and PoE scheduling will satisfy even the most advanced small business networks.
- Fundamentally change and simplify network usability for easier and smoother deployment of voice, video, and WLAN on the same converged platform.
- Industry-leading 5-year warranty on switches, 5-year Next-Business-Day (NBD) replacement, and 90-days free technical support\*\* for peace-of-mind.

Within small and medium-sized organizations, there is growing adoption of PoE devices such as VoIP phones, IP security cameras, wireless access points, proximity sensors, LED lighting, door locks, and other IoT devices that require network switches capable of supporting dense PoE installations. Wireless access points and pan-tilt-zoom HD cameras using Wave 2 802.11ac Wi-Fi also require PoE+ power (802.3at), increasing the power demands on PoE switches. Therefore, PoE-capable versions (GC110P, GC510PP) are designed with PoE power budgets to meet the current and future needs of wireless converged networks.




### **Example Application**

#### In A Business/ Retail Environment

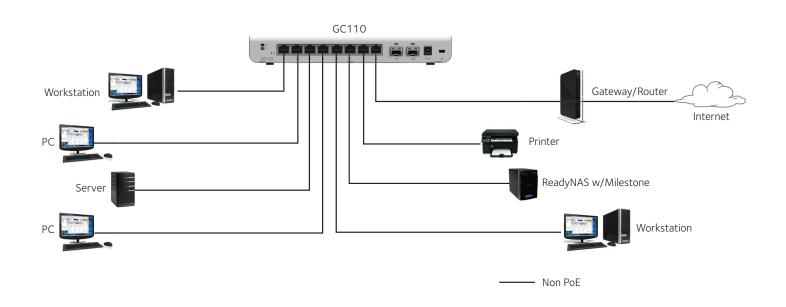


#### In A Small Office/ Workgroup Environment

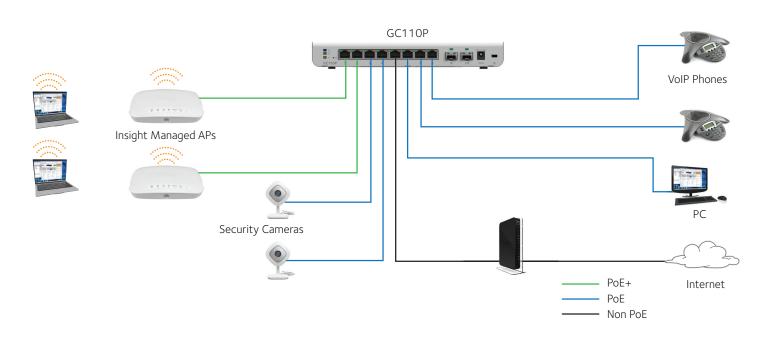



### **Example Application**

#### In A Security and Surveillance Environment

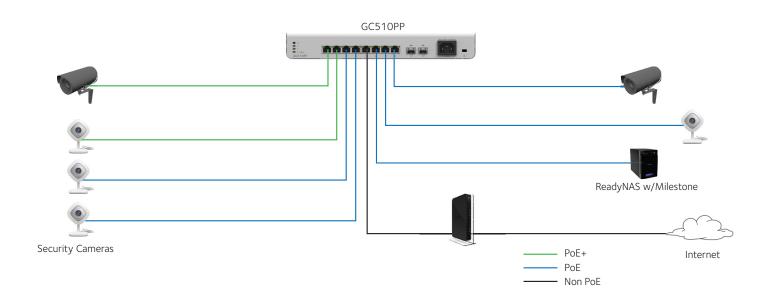



Large screen access via Insight Cloud Portal





Port configuration and monitoring



Network dashboard



Single pane-of-glass view of multiple networks/locations



Technical Specifications	GC110	GC110P	GC510P	GC510PP
Gigabit Ethernet RJ-45 Copper ports (10M/100M/1G) - 1000BASE-T	8	8	8	8
PoE/PoE+ ports	N/A	8 PoE (62W PoE budget)	8 PoE+ (134W PoE budget)	8 PoE+ (195W PoE budget)
Gigabit SFP (fiber) ports (100M/1G) - 1000BASE-X	2 (dedicated)	2 (dedicated)	2 (dedicated)	2 (dedicated)
Power Supply	External Input: 12V/1.5A	External Input: 48V/1.67A	Internal 100-240VAC ~ 50-60Hz, 2A Max	Internal 100-240VAC ~ 50-60Hz, 4A Max
Kensington Lock	Yes (rear)	Yes (rear)	Yes (rear)	Yes (rear)
LEDs				
Front (per device)		Cloud/Internet C	onnection, Power	
Rear (per device)	Cloud/Internet Connection, Power	Cloud/Internet Connection, Power, PoE Max	Cloud/Internet Connection, Power, PoE Max	Cloud/Internet Connection, Power, PoE Max, Fan Status
Rear (per port)	Speed/Link/ Activity	Speed/Link/ Activity	Speed/Link/ Activity (left), PoE Power (right)	Speed/Link/ Activity (left), PoE Power (right)
Unified Network Management (Discovery, Setup	, Monitoring, And	Management)		
Discovery, setup, monitoring and management	NETGEAR Insight PC, Mac, or tablet	mobile app on pho web browser	ne or tablet; Insight	Cloud Portal from
Remote/Cloud management		ne, from the palm of lac, or tablet web br		
Centralized network configuration (policies)		ork configuration (po Points, and Business- AGs		
Device auto-join and configure (zero-touch provisioning)		t Managed devices a tomatically inherit th		ation
Multi-site, multi-network single pane-of-glass view		sites, locations, and p or Insight Cloud P		view using the
Multi-switch, multi-port concurrent configuration for ACLs, VLANs, QoS, PoE, etc		d policies on multipl ne using the Port Cor		ple switches
Performance Specification				
CPU	400 MHz Cortex-A NAND FLASH	A9 Single Core, 2561	MB RAM, 8MB SPI +	256MB
Packet buffer memory (Dynamically shared across only used ports)	1.5 MB			
Forwarding modes	Store-and-forward	d		
Bandwidth (non-blocking, full duplex)	20Gbps			
Priority queues	8			
Priority queuing	Weighted Round	Robin (WRR) and St	rict Priority	
MAC Address database size (48-bit MAC addresses)	16K (dynamic)			



Performance Specification	GC110	GC110P	GC510P	GC510PP		
Multicast Groups		5′	12			
Number of IPv4 static routes	32					
Number of IPv6 static routes	31					
Number of ARP/NDP cache entries		384 ARP /	128 NDP			
Number of VLANs		25	56			
Number of DHCP snooping bindings		8	K			
Access Control Lists (ACLs)		100 shared for MA	C, IP and IPv6 ACLs			
Packet forwarding rate (64 byte packet size) (Mfps or Mpps)			1.9			
1G Copper latency (µsec) (64-byte; 1518-byte; 9216-byte frames)		1518-bye:	3.000 µsec 3.040 µsec 3.100 µsec			
1G SFP Fiber latency (µsec) (64-byte; 1518-byte; 9216-byte frames)		1518-bye:	2.000 µsec 2.140 µsec 2.180 µsec			
Jumbo frame support		Up to 9,216	packet size			
Acoustic noise level @ 25° C (dBA) (ANSI-S10.12)	0 dBA (fanless)	0 dBA (fanless)	0 dBA (fanless)	28 dBA		
Mean Time Between Failures (MTBF) @ 25° C	4,013,311 hrs (458 yrs)	2,976,994 hrs (340 yrs)	692,457 hrs (79 yrs)	381,503 hrs (44 yrs)		
POE Configuration						
Number of PoE (802.3af) / PoE+ (802.3at) ports	N/A	8 PoE	8 PoE+	8 PoE+		
Total PoE power budget (watts)	N/A	62 W	134 W	195 W		
Advanced per-port PoE controls (enable/disable/power limit)	N/A	Yes	Yes	Yes		
Advanced per-port PoE scheduling/timers	N/A	Yes	Yes	Yes		
L2 Services - VLANS						
IEEE 802.1Q VLAN Tagging		Ye	es			
MAC-based VLANs		Ye	es			
Auto-VoIP VLAN / Auto-Voice VLAN	Yes, based o	on OUI bytes (default in the phone sou	database and user-l rce MAC address	oased OUIs)		
Auto-VoIP	Yes	, based on protocols Prioritzes traffic to	s (SIP, H.323 and SCC o a higher queue.	CP).		
Voice VLAN			or 802.1p priority, pa VoIP phone using LLI			
Auto-Video VLAN		Ye	es			
Private VLAN		Ye	es			
L2 Services - Availability						
Broadcast, multicast, unknown unicast storm control		Ye	es			
IEEE 802.3ad - LAGs (LACP)		Ye	es			



L2 Services - Availability	GC110	GC110P	GC510P	GC510PP
IEEE 802.3x (full duplex and flow control)		Ye	S	
IEEE 802.1D Spanning Tree Protocol		Ye	S	
IEEE 802.1w Rapid Spanning Tree Protocol		Ye	S	
IEEE 802.1s Multiple Spanning Tree Protocol		Ye	S	
Layer 2 DHCP Relay		Ye	s	
L2 Services - Multicast Filtering				
IGMP snooping (v1, v2 and v3)		Ye	S	
MLD snooping support (v1 and v2)		Ye	S	
IGMP snooping queries		Ye	S	
Block unknown multicast		Ye	S	
Multicast VLAN Registration (MVR)		No		
Multicast groups		51:	2	
L3 Services - DHCP				
DHCP client		Ye	S	
DHCP snooping		Ye	S	
Number of DHCP snooping bindings		8k	<	
L3 Services - Routing				
IPv4 static routes		32	2	
IPv6 static routes		31		
VLAN routing		Ye	S	
Host ARP table / NDP cache (number of entries)		384 ARP /	128 NDP	
ICMP Router Discovery Protocol (IRDP)		Ye	S	
Number of IP VLAN interfaces (routed VLANs)		15	)	
Link Aggregation				
IEEE 802.3ad - LAGs (LACP)		Ye:	s	
Manual Static LAG		Ye:	S	
# of Static or LACP LAGs # of members in each LAG		5 LAGs with max 8 me	embers in each LA	\G
Network Monitoring and Discovery Services				
802.1ab LLDP		Ye	S	
LLDP-MED		Ye	S	
Network Security				
IEEE 802.1x		Ye	S	
Guest VLAN		Ye	S	
RADIUS-based VLAN assignment via .1x		Ye:	S	
MAC-based .1x		Ye	S	



Network Security	GC110	GC110P	GC510P	GC510PP		
RADIUS accounting		Ye	es			
Access Control Lists (ACLs)	L2/L3/L4					
IP-based ACLs (IPv4 and IPv6)	Yes					
MAC-based ACLs	Yes					
TCP/UPD-based ACLs		Ye	es .			
MAC lockdown		Ye	es .			
MAC lockdown by the number of MACs		Ye	es .			
Control MAC # Dynamic learned entries (per port)		409	96			
Control MAC # static entries (per port)		48	3			
IEEE 802.1x RADIUS port access authentication/type		Yes (MD5, E	EAP, PEAP)			
Port-based security by locked MAC addresses		Ye	es			
Dynamic ARP inspection		N	0			
Broadcast, multicast, unknown unicast storm control		Ye	es			
DoS attacks prevention	Yes					
Protected ports	Yes					
Quality of Service (QoS)						
Port-based rate limiting		Yes, eg	yress			
Port-based QoS	Yes					
Support for IPv6 fields	Yes					
DiffServ QoS		Yes, ing	gress			
IEEE 802.1p COS		Yes	5			
Destination MAC and IP		Yes	5			
IPv4 and v6 DSCP		Yes	5			
IPv4 and IPv6 ToS		Yes	5			
TCP/UDP-based		Yes	5			
Weighted Round Robin (WRR)		Yes	5			
Strict priority queue technology		Yes	5			
Auto-VoIP VLAN / Auto-Voice VLAN	Yes, based on C	OUI bytes (default dat phone source N		sed OUIs) in the		
Auto-VoIP	Yes	, based on protocols Prioritzes traffic to	(SIP, H.323 and SC a higher queue.	CP).		
Voice VLAN		either VLAN ID or 80 the connecting VoIP				
Auto-Video VLAN		Yes	5			
Other Features						
Advanced per-port PoE controls (enable/disable/power limit)	N/A	N/A	Yes	Yes		
Advanced per-port PoE scheduling	N/A	N/A	Yes	Yes		



Technical Specification	GC110	GC110P	GC510P	GC510PP		
Loop detection & prevention	Yes (both)	Yes (both)	Yes (both)	Yes (both)		
DNS Client	Yes	Yes	Yes	Yes		
Option to enable/disable BPDU flooding when STP is disabled	Yes	Yes	Yes	Yes		
Option to enable/disable the flooding of EAPOL when 802.1x is disabled	Yes	Yes	Yes	Yes		
IEEE Network Protocols						
<ul> <li>IEEE 802.3 Ethernet</li> <li>IEEE 802.3u 100BASE-T</li> <li>IEEE 802.3ab 1000BASE-T</li> <li>IEEE 802.3z Gigabit Ethernet 1000BASE-SX/LX</li> <li>IEEE 802.3af PoE</li> <li>IEEE 802.3at PoE+ (GC510P, GC510PP only)</li> <li>IEEE 802.3ad Trunking (LACP)</li> <li>IEEE 802.3az Energy Efficient Ethernet (EEE)</li> </ul>	<ul> <li>IEEE 802.3x Full-Duplex Flow Control</li> <li>IEEE 802.1Q VLAN Tagging</li> <li>IEEE 802.1AB LLDP with ANSI/TIA-1057 (LLDP-MED)</li> <li>IEEE 802.1p Class of Service</li> <li>IEEE 802.1D Spanning Tree (STP)</li> <li>IEEE 802.1s Multiple Spanning Tree (MSTP)</li> <li>IEEE 802.1w Rapid Spanning Tree (RSTP)</li> <li>IEEE 802.1x RADIUS Network Access Control</li> </ul>					
Management, Monitoring & Troubleshooting						
Cloud/Remote management		Ye	es			
Insight mobile app & Insight Cloud Portal management		Ye	es			
uPnP Discovery		Ye	es			
Bonjour Discovery		Ye	25			
Networking monitoring		Ye	es			
Data/performance logs	Yes					
Centralized network configuration/policies (network-centric management)		Ye	28			
Device auto-join and configure (zero-touch provisioning)		Ye	es			
Multi-site, multi-network single pane-of-glass view		Ye	es			
Multi-switch, multi-port concurrent configuration		Ye	es			
Network/global password (for all Insight Managed devices on a network)	Yes	s (per network/subne mobile app and In	et via NETGEAR Insig sight Cloud Portal)	ht		
Network/global password (for all Insight Managed devices on a network)	Yes (p	er network/subnet v	via NETGEAR Insight	арр)		
Password management		Ye	es			
IP Access List		Ye	es			
Configurable management VLAN		Ye	es			
Admin access control via RADIUS and TACACS+		Ye	25			
IPv6 management		Ye	25			
SNTP client over UDP port 123		Ye	es			
Firmware upgrade direct from Cloud (via mobile device or Insight Cloud portal)		Ye	es			
Port mirroring		Ye	98			
Many-to-one port mirroring		Ye	<u>9</u> S			



Technical Specifications	GC110	GC110P	GC510P	GC510PP		
Cable test utility		Ye	es			
Ping and tracerout client	Yes					
Local-only web browser-based management GUI	Yes					
SSL/HTTPS Web-based access (version)		Yes	(v3)			
TLS Web-based access (version)		Yes (	v1.0)			
TFTP/HTTP firmware upload/download		Ye	es			
Dual software (firmware) image		Ye	es			
Memory and flash log		Ye	es			
Syslog (RFC 3164)		Ye	es			
Power Consumption						
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)	10.1 W	10.3 W	10.3 W	10.3 W		
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)	N/A	74.4 W	146.9 W	200.0 W		
Min power (link-down standby) (Watts)	7.9 W	8.1 W	8.1 W	8.1 W		
Heat Dissipation (min w/o PoE and max with full PoE) (BTU/hr)	Min: 30.03 BTU/hr Max: 38.22 BTU/hr	Min: 30.71 BTU/hr Max: 282.07 BTU/hr	Min: 30.71 BTU/hr Max: 556.94 BTU/hr	Min: 30.71 BTU/h Max: 758.25 BTU/h		
Energy Efficient Ethernet (EEE) IEEE 802.3az	All models - Yes, deactivated by default					
Auto power down	All models - Yes, deactivated by default					
Fan(s) (temperature- and load-based speed control)	Fanless	Fanless	Fanless	1		
Physical Specifications						
Dimensions (W x D x H)	245 x 123 x 33 mm (9.6 x 4.8 x 1.3 in)	245 x 123 x 33 mm (9.6 x 4.8 x 1.3 in)	314 x 188 x 44 mm (12.4 x 7.4 x 1.7 in)	314 x 188 x 44 mr (12.4 x 7.4 x 1.7 in		
Weight	0.73 kg (1.61 lb)	0.77 kg (1.70 lb)	2.01 kg (4.43 lb)	2.23 kg (4.92 lb)		
Mounting options		els: Desktop, wall mo 510P/GC510PP: +R				
Environmental Specifications						
Operating						
Operating Temperature (Switch)	0° to 45°C (32° to 113°F)	0° to 45°C (32° to 113°F)	0° to 45°C (32° to 113°F)	0° to 45°C (32° to 113°F)		
Operating Temperature (External Power Adapter)	0° to 40°C (32° to 104°F)	0° to 40°C (32° to 104°F)	NA	NA		
Humidity	90% m	aximum relative hun	nidity (RH), non-cond	densing		
Altitude		10,000 ft (3,00	0 m) maximum			
Storage						
Storage Temperature		–20° C to 70° C	(- 4° F to 158° F)			
Humidity (relative)	95% m	aximum relative hun	nidity (RH), non-cond	densing		
Altitude	10,000 ft (3,000 m) maximum					



Electromagnetic Emissions and Immunity Certifications	GC110	GC110P	GC510P	GC510PP		
		CE Mark, C	ommercial			
		EN55032:2012+	AC:2013, Class A			
		EN55024:20	10+A1:2015			
		EN61000-3-2:	2014, Class A			
	EN61000-3-3:2013					
C. If I	VCCI-CISPR 32:2016, Class A					
Certifications	RCM, AS/NZS CISPR 32:2015 CLASS A					
	47 CFR FCC Part 15, Subpart B, Class A					
	ICES-003:2016 Issue 6, Class A  BSMI CNS13438, Class A  KCC KN32 / KN35					
	GB/T 9254-2008 <sup>3</sup>					
Safety Certifications						

CB Mark, Commercial

EN 60950-1: 2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013

UL 60950-1, 2nd, 2014 and CAN/CSA C22.2 No. 60950-1-07, 2nd, 2014

IEC 60950-1:2005 (ed.2) + Am 1:2009 + Am 2:2013

RCM, AS/NZS 60950.1:2015

BSMI CNS14336-1

KCC K60950-14

CCC GB4943.1-2011<sup>3</sup>

Warranty and Support				
Hardware Limited Warranty (Switch)	5 years	5 years	5 years	5 years
External Power Adapter Warranty	2 years	2 years	N/A	N/A
Next-Business-Day (NBD) Replacement	5 years			
Technical support (online, phone)	90 days free from date of purchase*			
ProSUPPORT OnCall 24x7 Service Packs**	PMB0S12 (1 yr) PMB0S32 (3 yrs) PMB0S52 (5 yrs)			
Package Contents				
All models	NETGEAR Insight 8-Port Gigabit Ethernet Smart Cloud Switch with 2 SFP Fiber Ports			
	Rubber footpads for tabletop installation			
	Wallmount kit (with 75mm VESA standard pattern)			
	Installation guide			
GC110, GC110P Only	DC	power adapter (loca	lized to country of s	ale)
GC510P, GC510PP Only	AC power cord (localized to country of sale) Rackmount kit			

<sup>&</sup>lt;sup>2</sup> English, German, and Japanese are the current supported languages in the local-only web GUI. The Insight mobile app and Insight Cloud Portal support local languages per the device used (phone or computer browser).

Certifications

<sup>&</sup>lt;sup>3</sup> GC110, GC110P Only

<sup>&</sup>lt;sup>4</sup> GC510P, GC510PP Only

<sup>\*</sup> This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration using the Insight mobile app or Insight Cloud portal within 90 days of purchase; see https://www.netgear.com/ about/warranty for details. Intended for indoor use only.



0.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1		
Ordering Information		
GC110-100NAS	North America and Latin America	
GC110-100PES	Europe	
GC110-100UKS	United Kingdom	
GC110-100AUS	Australia	
GC110-100JPS	Japan and Asia Pacific	
GC110-100KOS	Korea	
GC110-100PRS	China	
GC110P-100NAS	North America and Latin America	
GC110P-100PES	Europe	
GC110P-100UKS	United Kingdom	
GC110P-100AUS	Australia	
GC110P-100JPS	Japan and Asia Pacific	
GC110P-100PRS	China	
GC510P-100NAS	North America and Latin America	
GC510P-100EUS	Europe and United Kingdom	
GC510P-100AJS	Japan, Asia Pacific, and Australia	
GC510PP-100NAS	North America and Latin America	
GC510PP-100EUS	Europe and United Kingdom	
GC510PP-100AJS	Japan, Asia Pacific, and Australia	
Optional Modules and Accessories		
AGM731F-10000S	SFP Transceiver 1000BASE-SX (Short range, multimode)	
AGM732F-10000S	SFP Transceiver 1000BASE-LX (Long range, single mode)	
AGM734-10000S	SFP Transceiver 1000BASE-T Copper RJ45 GBIC	
Extended Support Contracts		
PMB0S12-10000S	1-Year OnCall 24x7 Service Pack**	
PMB0S32-10000S	3-Year OnCall 24x7 Service Pack**	
PMB0S52-10000S	5-Year OnCall 24x7 Service Pack**	

NETGEAR, the NETGEAR Logo, and NETGEAR Insight are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s).

NETGEAR, Inc. 350 E. Plumeria Drive, San Jose, CA 95134-1911 USA, 1-888-NETGEAR (638-4327), E-mail: info@NETGEAR.com, www.NETGEAR.com

DS-GC110/GC110P/GC510P/GC510PP-14Jan21

<sup>&#</sup>x27;This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration using the Insight mobile app or Insight Cloud portal within 90 days of purchase; see https://www.netgear.com/about/warranty for details. Intended for indoor use only.

 $<sup>^{**}</sup>$ The NETGEAR OnCall 24x7 contract provides unlimited phone, chat and email technical support for your networking product.